


DULOK-8 SR1™

DOUBLE WIRE PANEL SYSTEM TO SECURED BY DESIGN

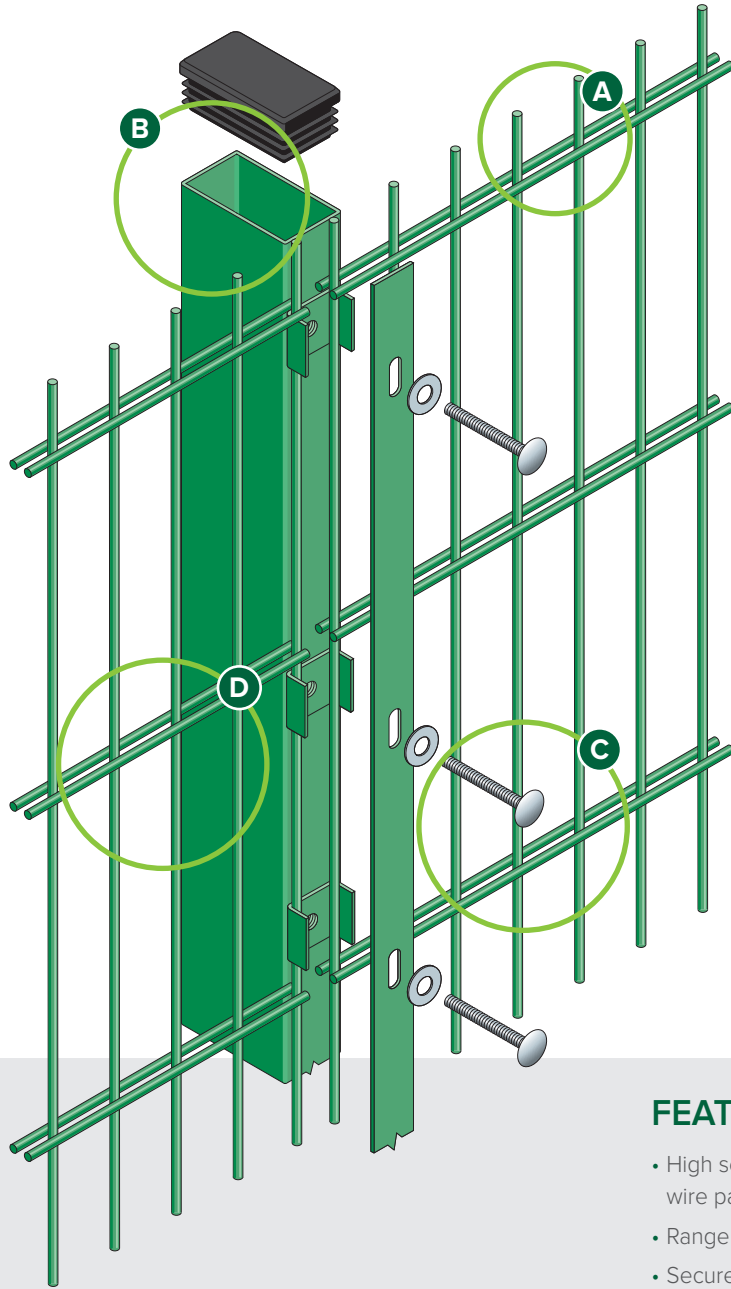

- A** Strong anti-cut through panel, security rated
- B** Galvanised and polyester powder coated panels and posts
- C** Stainless steel Sheardrive™ bolts
- D** Twin horizontal wires for maximum rigidity

Conforms to **BS1722: Part 14**



Exploded view of post and clamp for Dulok-8 SR1 double wire panel system
NB: This product has additional features not demonstrated for security reasons


FEATURES

- High security anti-cut, double wire panels
- Range of height options
- Secured by Design accredited system
- Full range of RAL colours available


SUITABLE FOR

- Schools
- Public buildings
- Industrial buildings
- Secure data centres
- Police stations


SYSTEM DETAILS




Plan of end post



Plan of panels in line



Plan of internal corner



Plan of external corner

CALL 01270 764751 OR VISIT WWW.CLD-FENCING.COM



DESCRIPTION

Even the smallest of security enhancements can give your perimeter fencing an edge, adding immeasurable protection to your premises. These modifications make Dulok-8 SR1™ an even greater defence against criminals than our base Dulok™ system.

Dulok-8 SR1™ mesh panels are made from twin, heavy duty 8mm wires welded either side of 6mm vertical wires, but rather than using pin hex screws, they are fixed to galvanised steel posts using Sheardrive security bolts; practically impossible for vandals and intruders to remove.

Certified to LPS 1175 SR1 Security Ratings, it's guaranteed to stop any attacks from basic tools, and with Secured by Design accreditation from the UK Police, it provides the perfect perimeter for public buildings, schools and sports pitch applications.

You also have the option to include further deterrents to the top of each panel with Dulok-8 SR1™ being compatible with our Active Anti-Intruder topping range.

FINISH

Our welded steel wire mesh fencing panels are hot dip galvanised only or galvanised and polyester powder-coated. The standard colour is Green RAL 6005. RAL range of colours available.

PANEL DIMENSIONS

| | |
|----------------------------|---|
| Heights | 1830, 2030, 2430, 3030mm |
| Panel width | 2506mm |
| Mesh size | 200 x 50mm |
| Wire diameter | 6mm verticals 2 x 8mm horizontals |
| Top edge projection | 30mm† |

† Can be inverted to give flush edge

All dimensions are nominal

DULOK-8 SR1 POSTS AND CLAMPS

For the Dulok-8 SR1 double wire panel system, CLD has developed a post and clamp bar system which provides a simple method of securing. Complete with an anti-vandal fastener, installed with either a battery-powered driver or traditional tools, this system offers a rapid and secure installation.

SLOPING GROUND

Panels can be stepped as required. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried or additional posts are used.

VARIATIONS

The posts are available in a range of lengths to accommodate panel heights and ground conditions. In addition, many variations are available.



DIMENSIONS

| | |
|-------------------------|---|
| Posts | 60 x 40mm RHS (up to 2430mm) 80 x 40mm RHS (3030mm) |
| Corner posts | 60 x 40mm RHS (up to 2430mm) 80 x 40mm RHS (3030mm) |
| Post centres | 2520mm |
| Clamping channel | 40 x 5mm Steel |

