

AJAX

Professional wireless security system



# Contents

04	Basic Sets	26	CombiProtect
05	Anti-sabotage	28	KeyPad
06	Jeweller	29	SpaceControl
08	Hub OS Malevich	30	HomeSiren
09	Ajax Cloud	31	StreetSiren
10	SmartBracket	32	FireProtect
11	Apps for Users	34	LeaksProtect
12	App for PROs	36	Socket
14	Hub	38	WallSwitch
18	MotionProtect	39	Relay
20	MotionProtect Outdoor	40	Transmitter
22	DoorProtect	42	Coming soon
24	GlassProtect		

# The most awarded wireless security system in Europe



Intruder Alarm of the Year



The Best Innovative Product



Innovative Security Product of the Year



Security & Firefighting Risks



# Basic sets

## A quick start to protecting a home

The starter kits include everything you need for full protection. High-precision sensors monitor what's happening indoors, and a powerful hub instantly broadcasts a signal to your smartphone and the off-site surveillance center at the first signs of a break-in.




### StarterKit Basic set

### StarterKit Plus Advanced basic set

**Hub**  
Intelligent control panel

**Hub Plus**  
Intelligent security control panel with Wi-Fi, 3G, and dual SIM



**MotionProtect**  
Wireless pet immune motion detector

**MotionProtect**  
Wireless pet immune motion detector



**DoorProtect**  
Wireless opening detector

**DoorProtect**  
Wireless opening detector



**SpaceControl**  
Key fob with a panic button

**SpaceControl**  
Key fob with a panic button



# Anti-sabotage

## Threat management

Ajax can prevent both software and hardware attacks. It was designed with all possible threats to the system in mind. The detectors are protected from physical tampering and the radio channel is secure from jamming and sabotage. And the system immediately detects any outside intrusions.




### Blackouts

The system reports power failures and continues working from the backup battery



### GSM Jamming

The system will work in full protection mode through Ethernet or Wi-Fi



### Hacking Attempts

All data is heavily encrypted to ensure safety



### Internet Issues

A backup GSM signal sends notifications in the event of a network failure



### Jammed Radio Channel

The system notifies users and monitoring stations of jamming and switches to a clean frequency



### Open Detectors

All devices are tamper proof; an instant alarm is sent when the lid is removed



### Detector Failure

Frequent pinging ensures an alert is sent as soon as a device stops responding



### Server Unavailable

Ajax Cloud can send notification in a minute if the hub is offline

# Jeweller

## Know-how radio technology for stable communication with detectors over long distance

Jeweller is our proprietary radio technology that offers an advanced level of protection. It is just as reliable as traditional wires and performs better in transferring information. All data is encrypted with a floating key algorithm, and the signal is protected to prevent interception or forgery. If jamming occurs, the system notifies the owner and switches to a backup frequency.

**2000 m**

Distance between detectors and hub

**0.15 s**

Alarm delivery time

**7 years**

Maximum detector battery life

**12 s**

Minimum polling period

**25 mW**

Radio signal power


**868.0–868.6 MHz**

Device and detector operating frequencies

## An impressive operation range

Jeweller connects detectors to the hub at a distance of 2 km. Devices automatically adjust their signal power, depending on the distance from the hub. This helps the detectors conserve power: the devices can operate for up to 7 years without replacing batteries.



	Jeweller		2000 m
	ZigBee		150 m
	Z-Wave		150 m
	Wi-Fi		100 m

# Hub OS Malevich

## Secure real-time operating system for stable operation of Ajax

Hub OS Malevich is the real-time operating system that supports advanced cloud communication protocols over several channels. It manages a network of hundreds of radio devices. Hub OS Malevich can simultaneously send alarm messages over IP channels, dial telephones and send SMS. It possesses all needed professional security system capabilities and protects from attacks.



Protects against viruses and bot attacks



Verifies device operation status  
and reports to the system owner



Over-the-air updates regularly  
provide new features




Ensures the system  
does not get overloaded



# Ajax Cloud

Cloud service with advanced load balancing for round-the-clock monitoring of the system from any location worldwide

We have created a digital ecosystem that empowers the capabilities of Ajax devices. Thanks to Ajax Cloud, all processes are regulated and accurate. It takes just milliseconds to send an alarm from the hub to the server and then to the user. The system can be configured remotely with a few clicks. And every remote firmware update increases the functionality of the system.

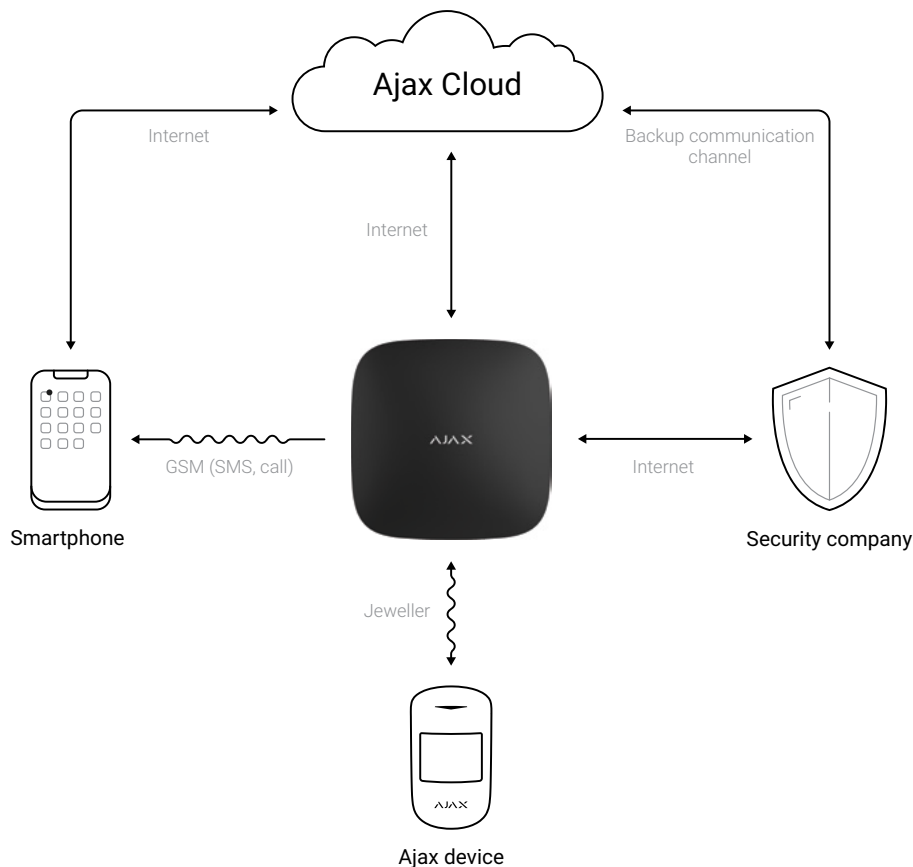


## Tech Specs

- Hub polling every 10 seconds
- Detailed info about device status
- Remote system setup
- Automatic software updates
- Direct connection with CMS


# SmartBracket

## Quick installation


We made professional-level installation as simple as possible. Detectors come with batteries and are pre-set to work as soon as you take them out of the box. The Ajax Security System mobile app will help you choose the best place for device installation. After that, you simply screw the SmartBracket to the wall and install the detector on it.

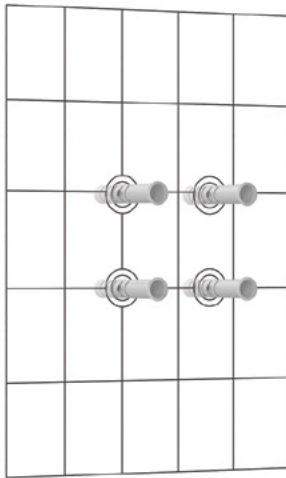

Wall



SmartBracket  
mount (included)



Screws  
(included)



Detector


- On average, the Ajax StarterKit can be installed in under 30 minutes
- Installation requires minimal tools and effort
- Detectors do not require disassembly before installation
- Interactive instructions are available on the mobile app
- Detectors can be tested using a smartphone









# Apps for Users

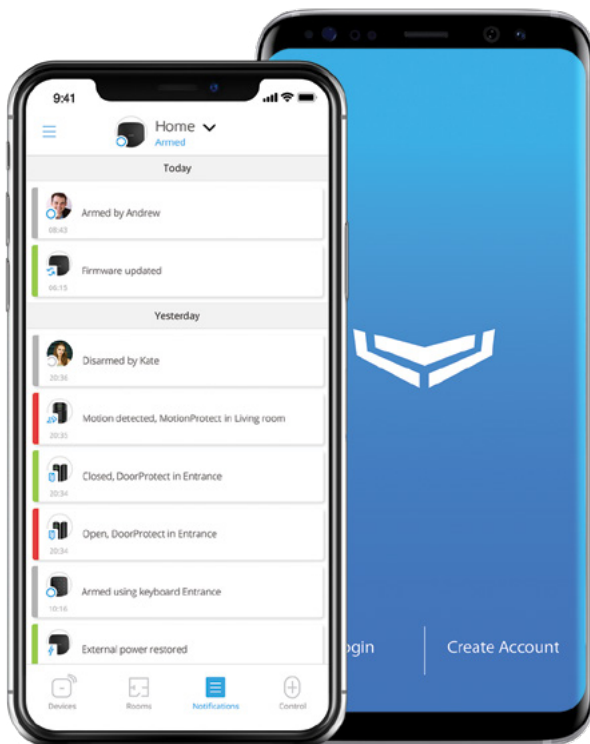

## Protect your home with a tap

The Ajax Security System app is a virtual control center, available day and night. You can check the system status, arm/disarm it or change the system configuration. All with just a few taps on your smartphone or tablet.



-  Arming/disarming
-  Night mode
-  Group mode
-  Instant notifications
-  Video surveillance
-  Remote testing and configuration
-  Detailed info about device status
-  Regular updates

# Apps for PROs

## Round-the-clock facility control

The Ajax PRO apps help easily manage a variety of facilities with your smartphone or PC. Test and configure devices before going to a site, get instant notifications about alarms and malfunctions, and manage the list of people who have access to the hubs.



Quick search by name or hub ID



Full-scale monitoring of up to 2500 facilities



Detector testing



Remote hub configuration



Access level management



Instant alarm pop-up notifications **Desktop Only**



History of events




Customer cards **Desktop Only**






# Ajax PRO Desktop

## Free PC monitoring application

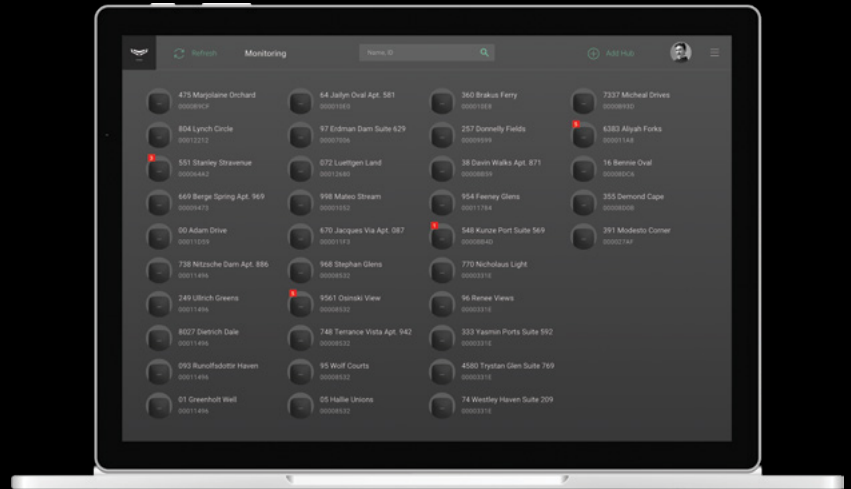

# Ajax PRO: Tool for Engineers

## Free application for installers and security engineers

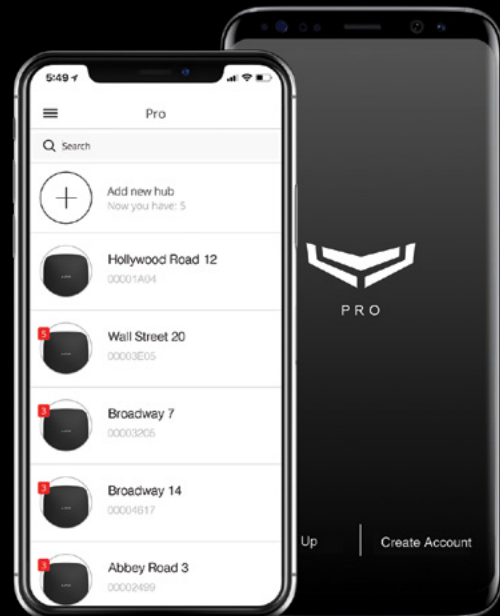



# Hub

## Intelligent control panel

The Hub intelligent control panel is the key element of the Ajax security system. The device monitors operation of all Ajax detectors and immediately send an alarm signal to the owner and the Central Monitoring Station.

### Hub

2G & Ethernet

1 SIM

Up to 100 connected devices

Up to 10 connected cameras

Up to 50 users

Up to 15 hours of offline operation

### Hub Plus

Wi-Fi, 3G, 2G & Ethernet


Dual SIM

Up to 150 connected devices

Up to 50 connected cameras

Up to 99 users

Up to 16 hours of offline operation

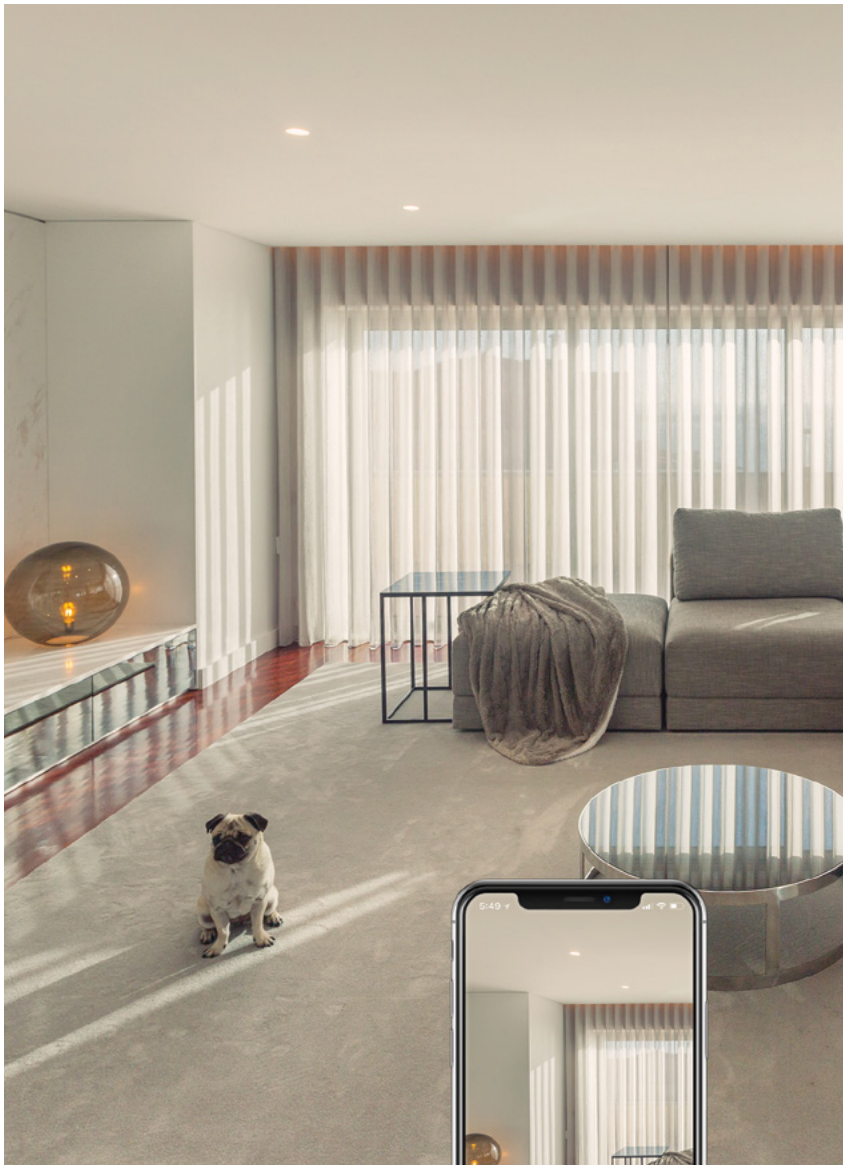

Video surveillance via third-party cameras

## Bulletproof Protection



Tampering alarm



External power failure immediately activates an alarm



Hub and Hub Plus works up to 15 and 16 hours respectively on battery backup



Pings every 12-300 seconds to monitor the system



Jamming detection, communication channels encryption and authentication



A backup GSM signal will notify in case of a network failure



Real time OS guarantees protection from viruses and intrusion

## Simple Installation



Devices connect to hubs with a few clicks in mobile app




The system can be installed easily in under 30 minutes using the interactive manual and SmartBracket mounts



The quality of the connection, device detection area and level of radio noise can be tested remotely


## Effortless Operation


- The system works even with very poor connections: the system works at a speed of just 0.5 kbit/s
- Two-way communication allows for periodic testing and easy customization
- Firmware and software updates are free and automatic
- The system can be easily controlled using a keychain remote or a smartphone app
- Hubs securely maintain a history of the last 500 events
- Geofence technology can remind you to arm the security system when you leave and disarm it when you get back

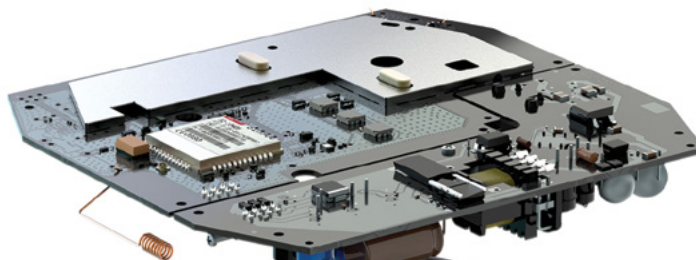

## Engineering Masterpiece

- An ARM processor provides additional power for critically important tasks
- The ultrathin AC power adapter is built into the body

 Hubs are less than 4 cm thick

 Size: 163x163x36 mm



## Tech Specs

- Color: white/black
- Power: 110-240 V AC
- Radio signal power: 25 mW
- Operating temperature range:  
Hub: from +5°C to +40°C  
Hub Plus: from -10°C to +40°C
- Connection:  
Hub: GSM (850/900/1800/1900 MHz),  
Ethernet  
Hub Plus: 2G/3G GSM900/DCS1800,  
WCDMA 900/2100 (B8/B1), Ethernet,  
Wi-Fi 2.4 GHz (802.11 b/g/n)
- Back-up battery: Li-Ion 2 A·h
- Apps available:  
iOS 9.1 or later, Android 4.1 or later
- Weight: 350 g





# MotionProtect

## Wireless pet immune motion detector

Wireless motion detector that notifies the owner of the first signs of home or office intrusion. The detector is fastened to the wall in front of the doors, windows and other places likely of intruder entry.




### Maximum Performance

- Works up to 1,700 meters from the hubs in open space
- Detects motion up to 12 meters away
- Processes all signals digitally




### Effortless Operation

- Adjustable to three different sensitivity levels
- Uses our SmartDetect algorithm to avoid false alarms from animals with weight of up to 20 kg and height up to 50 cm
- Eliminates false alarms from gear and electromagnetic interference using a FresnelTech optical component, made from POLY IR4 material and an Excelitas PIR sensor
- Works under most conditions due to digital temperature compensation
- Two-way communication with the hubs allows for periodic testing and customization

### Simple Installation

-  Connects to the hubs with a few clicks and QR code
-  The quality of the connection and detection area can be tested remotely
-  No need to disassemble the body when installing using SmartBracket mounts

### Bulletproof Protection

-  Authentication to prevent forgery
-  Jamming detection and communication channels encryption
-  Tampering alarm

# Tech Specs

- Color: white/black
- Detector type: wireless
- Use: indoor
- Detecting element: PIR sensor
- Detection angle:  
88.5° horizontal / 80° vertical
- Installation height suggested:  
2.4 m
- Pet ignoring option:  
weight up to 20 kg, height up to 50 cm
- Temperature sensor: available
- Radio signal power: 20 mW
- Power supply: CR123A battery
- Power supply voltage: 3 V
- Operating temperature range:  
from +5°C to +40°C
- Operating humidity: up to 75%
- Dimensions: 110x65x50 mm
- Weight: 86 g



Battery life is up to 7 years



## MotionProtect Plus

- ⊕ Additional microwave sensor
- ⊕ Filters interference with radio frequency scanning
- ⊕ Avoids false alarms even in rooms or warehouses with active air conditioners and fireplaces
- ⊕ Battery life is up to 5 years



# MotionProtect Outdoor

## Wireless outdoor motion detector with anti-masking protection and pet immunity

Wireless outdoor motion detector with intelligent protection against false alarms. The device operates at low temperatures and is protected against dust and splashes.




### Maximum Performance

- Works up to 1,200 meters from the hubs in open space
- Detects movement at a distance up to 3–15 meters
- Grade 3 anti-masking against obstacles, paint or stickers
- Processes all signals digitally

### Effortless Operation

- Adjustable to three different sensitivity levels
- Two-way communication with the hubs allows for periodic testing and customization
- Hi-end Excelitas PIR sensors and FresnelTech optical components, made from IR resistant material POLY IR9

### Simple Installation




-  Connects to the hubs with a few clicks and QR code
-  The quality of the connection and detection area can be tested remotely
-  No need to disassemble the body when installing using SmartBracket mounts



Live  
Intelligent  
Spectrum  
Analysis

LISA intelligent digital algorithm prevents false alarms from animals, swaying trees and plants as well as birds and insects that land on the detector

### Bulletproof Protection

-  Authentication to prevent forgery
-  Jamming detection and communication channels encryption
-  Tampering alarm

# Tech Specs

- Color: white
- Detector type: wireless
- Use: outdoor/indoor
- Detecting element: two PIR sensors
- Detection angle: 90° horizontal
- Installation height suggested: 0.8–1.3 m
- Pet ignoring option: height up to 80 cm
- Temperature sensor: available
- Radio signal power: up to 20 mW
- Power supply:  
two CR123A batteries or external 5–28V DC
- Power supply voltage: 3 V
- Operating temperature range:  
from -25°C to +60°C
- Operating humidity: up to 95%
- Dimensions: 183x70x65 mm
- Weight: 322 g



Battery life is up to 5 years





# DoorProtect

## Wireless magnetic opening detector

Wireless opening detector that notifies of first signs of room intrusion by means of a broken door or window. It can be mounted on all types of doors including a metal base.




### Maximum Performance

- Works up to 1,200 meters from the hubs in open space
- Allows connection to a third-party detector




### Effortless Operation

- Uses British-made reed switches that can be toggled more than 1,000,000 times without failure
- Two-way communication with the hubs allows for periodic testing and customization
- Saves energy by regulating power consumption based on the distance from the hubs

### Simple Installation

-  Connects to the hubs with a few clicks and QR code
-  The quality of the connection and detection area can be tested remotely
-  No need to disassemble the body when installing using SmartBracket mounts

### Bulletproof Protection

-  Authentication to prevent forgery
-  Jamming detection and communication channels encryption
-  Tampering alarm

## Tech Specs

- Color: white/black
- Detector type: wireless
- Use: indoor
- Distance to magnet:  
up to 1 cm (small magnet),  
up to 2 cm (big magnet)
- Temperature sensor: available
- Radio signal power: 20 mW
- Power supply: CR123A battery
- Power supply voltage: 3 V
- Operating temperature range:  
from +5°C to +40°C
- Operating humidity: up to 75%
- Dimensions: Ø 20x90 mm
- Weight: 29 g (without magnets)



Battery life is up to 7 years



## DoorProtect Plus

- ⊕ Built-in accelerometer reacts to vibration and impact
- ⊕ Detects inclination angle relative to the ground
- ⊕ Allows connection to a third-party detector
- ⊕ Battery life is up to 5 years



# GlassProtect

## Wireless glass break detector

Small wireless detector that notifies of glass being broken by intruders. It is installed at a distance of 9 m from the window and filters events that cause false alarms about breakage.




### Maximum Performance

- Works up to 1,000 meters from the hubs in open space
- Detects broken glass up to 9 meters away
- Allows connection to a third-party detector




### Effortless Operation

- Uses two-factor detection of broken glass at low and high frequencies to prevent false alarms
- Adjustable to three different sensitivity levels
- Two-way communication with the hubs allows for periodic testing and customization
- Saves energy by regulating power consumption based on the distance from the hubs

### Simple Installation

-  Connects to the hubs with a few clicks and QR code
-  The quality of the connection and detection area can be tested remotely
-  No need to disassemble the body when installing using SmartBracket mounts

### Bulletproof Protection

-  Authentication to prevent forgery
-  Jamming detection and communication channels encryption
-  Tampering alarm



# Tech Specs

- Color: white/black
- Detector type: wireless
- Use: indoor
- Detecting element: electret microphone
- Glassbreak detection distance: up to 9 m
- Detection angle: 180°
- Glassbreak sensitivity: 3 levels adjustable (low, medium, high)
- Temperature sensor: available
- Radio signal power: 20 mW
- Power supply: CR123A battery
- Power supply voltage: 3 V
- Operating temperature range: from +5°C to +40°C
- Operating humidity: up to 75%
- Dimensions: Ø 20x90 mm
- Weight: 30 g



Battery life is up to 7 years





# CombiProtect

## Wireless motion and glass break detector with pet immunity

Wireless combined motion and glass break detector. The device helps to secure the room from intruders entering through doors and windows, and monitors the current state of the glass.




### Maximum Performance

- Works up to 1,200 meters from the hubs in open space
- Detects motion up to 12 meters away
- Detects broken glass up to 9 meters away
- Processes all signals digitally




### Effortless Operation

- Adjustable to three different sensitivity levels
- Uses our SmartDetect algorithm to avoid false alarms from animals with weight of up to 20 kg and height up to 50 cm
- Eliminates false alarms from gear and electromagnetic interference using a FresnelTech optical component, made from POLY IR4 material and an Excelitas PIR sensor
- Works under most conditions due to digital temperature compensation
- Uses two-factor detection of broken glass at low and high frequencies to prevent false alarms
- Two-way communication with the hubs allows for periodic testing and customization

### Simple Installation

-  Connects to the hubs with a few clicks and QR code
-  The quality of the connection and detection area can be tested remotely
-  No need to disassemble the body when installing using SmartBracket mounts

### Bulletproof Protection

-  Authentication to prevent forgery
-  Jamming detection and communication channels encryption
-  Tampering alarm

## Tech Specs

- Color: white/black
- Detector type: wireless
- Use: indoor
- Detecting elements:  
PIR sensor (movement),  
electret microphone (glass break)
- Movement and glassbreak sensitivity:  
3 levels adjustable (low, medium, high)
- Movement detection angle:  
88.5° horizontal / 80° vertical
- Pet ignoring option:  
weight up to 20 kg, height up to 50 cm
- Glassbreak detection distance:  
up to 9 m
- Temperature sensor: available
- Radio signal power: 20 mW
- Power supply: CR123A battery
- Power supply voltage: 3 V
- Operating temperature range:  
from +5°C to +40°C
- Operating humidity: up to 75%
- Dimensions: 110x65x50 mm
- Weight: 92 g



Battery life is up to 5 years





# KeyPad

## Two-way wireless keyboard

Ajax KeyPad helps to manage the Ajax security system. Arm the system with a passcode or with the press of a button. Use a duress code to send a silent alarm to a central monitoring station.

### Maximum Performance

- Works up to 1,700 meters from the hubs in open space
- Activates Night mode
- Indication of protection status
- Protection against password guessing

### Effortless Operation

- Arm/disarm with a personal passcode
- One button arming
- Through two-way communication with the hubs, the keyboard confirms the delivery of any command

### Simple Installation



Connects to the hubs with a few clicks and QR code



The quality of the connection can be tested remotely



No need to disassemble the body when installing using SmartBracket mounts

### Bulletproof Protection



Authentication to prevent forgery



Jamming detection and communication channels encryption



Tampering alarm

### Tech Specs

- Color: white/black
- Device type: wireless
- Use: indoor
- Duress code: available
- Temperature sensor: available
- Radio signal power: 20 mW
- Power supply: 4 AAA batteries
- Power supply voltage: 3 V
- Operating temperature range: from  $-10^{\circ}\text{C}$  to  $+40^{\circ}\text{C}$
- Operating humidity: up to 75%
- Dimensions: 150x103x14
- Weight: 197 g
- Battery life is up to 2 years



# SpaceControl

## Two-way wireless key fob with a panic button

The four button key fob controls the security modes in the room. It is easy to activate and deactivate security modes using the key fob. The signal is sent in an encrypted format which prevents it from being intercepted.

### Maximum Performance

- Works up to 1,300 meters from the hubs in open space
- Equipped with panic button
- Activates Night mode

### Easy to use



Through two-way communication with the hubs, the key fob confirms delivery of any command

### Bulletproof Protection



Protected with rolling code encryption and authentication

### Tech Specs

- Color: white/black
- Number of buttons: 4
- Alarm button: available
- Radio signal power: 20 mW
- Power supply: CR2032 battery
- Power supply voltage: 3 V
- Operating temperature range: from -25°C to +50°C
- Operating humidity: up to 95%
- Dimensions: 65x37x10 mm
- Weight: 13 g
- Battery life is up to 3 years



# HomeSiren

## Wireless indoor siren

Wireless indoor siren that loudly notifies of an alarm during detector activation. It is installed indoors to warn of danger or deter intruders.

### Maximum Performance

- Works up to 2,000 meters from the hubs in open space
- Alarm length and sound level are customizable (81-105 dB)
- External LED connector
- Powered by the built-in batteries

### Effortless Operation

- Indicates current state (armed/disarmed)
- Beep on delay when entering & leaving
- Battery indicator shows battery level
- Two-way communication with the hubs allows for periodic testing and customization

### Simple Installation



Connects to the hubs with a few clicks and QR code



The quality of the connection can be tested remotely



No need to disassemble the body when installing using SmartBracket mounts

### Bulletproof Protection



Authentication to prevent forgery



Jamming detection and communication channels encryption



Tampering alarm

### Tech Specs

- Color: white/black
- Device type: wireless
- Use: indoor
- Temperature sensor: available
- Radio signal power: 25 mW
- Power supply: 2 CR123A batteries
- Power supply voltage: 3 V
- Ingress protection: IP50
- Operating temperature range: from  $-10^{\circ}\text{C}$  to  $+40^{\circ}\text{C}$
- Operating humidity: up to 75%
- Dimensions: 75x76x27 mm
- Weight: 97 g
- Battery life is up to 5 years



# StreetSiren

## Wireless outdoor siren with vandalism resistance

Wireless outdoor siren that notifies of danger using sound and light. The device is installed outside the room to raise an alarm for everyone to hear.

### Maximum Performance

- Works up to 1,500 meters from the hubs in open space
- Alarm length and sound level are customizable (85-113 dB)
- Powered by a 12 V DC power supply or built-in batteries

### Effortless Operation

- Indicates current state (armed/disarmed)
- Beep on delay when entering & leaving
- Battery indicator shows battery level
- Two-way communication with Ajax hubs allows for periodic testing and customization

### Simple Installation



Connects to the hubs with a few clicks and QR code



The quality of the connection can be tested remotely



No need to disassemble the body when installing using SmartBracket mounts

### Bulletproof Protection



Authentication to prevent forgery



Jamming detection and communication channels encryption



Tampering alarm

### Tech Specs

- Color: white/black
- Device type: wireless
- Use: indoor/outdoor
- Dismount protection: accelerometer
- Power supply: 4 CR123A batteries or external 12 V DC
- Temperature sensor: available
- Radio signal power: 25 mW
- Ingress protection: IP54
- Operating temperature range: from  $-25^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$
- Operating humidity: up to 95%
- Dimensions: 200x200x51 mm
- Weight: 528 g
- Battery life is up to 5 years



# FireProtect

## Wireless smoke & heat detector with sounder

Wireless fire detector with temperature sensor that monitors security in the room twenty four hours a day and immediately notifies of smoke and sharp jumps in temperature.




### Maximum Performance

- Works up to 1,300 meters from the hubs in open space
- Smoke detection
- Rapid temperature increase even without smoke immediately activates an alarm
- Several detectors combine to create a fire fighting system and alert about danger in unison
- Double-check before sending alarm




### Effortless Operation

- Can work autonomously without the hubs
- Has a built-in siren for smoke or heat alarms
- Checks the smoke chamber with a click in mobile app and automatically once a day
- Notifies users when it's time to clean smoke chamber
- Two-way communication with the hubs allows for periodic testing and customization

### Simple Installation

-  Connects to the hubs with a few clicks and QR code
-  The quality of the connection and detection area can be tested remotely
-  No need to disassemble the body when installing using SmartBracket mounts

### Bulletproof Protection

-  Authentication to prevent forgery
-  Jamming detection and communication channels encryption
-  Tampering alarm



## Tech specs

- Color: white/black
- Detector type: wireless
- Use: indoor
- Detecting element: photoelectric sensor, thermocouple
- Temperature sensor: from +54°C to 65°C
- Alarm type: light and sound
- Built-in siren volume: 85 dB
- Additional temperature sensor: available
- Radio signal power: 20 mW
- Power supply: 2 CR2 batteries
- Power supply voltage: 3 V
- Additional battery: CR2032
- Operating temperature range: from 0°C to +65°C
- Operating humidity: up to 80%
- Dimensions: 132x132x31 mm
- Weight: 220 g



Battery life is up to 4 years



## FireProtect Plus

- ⊕ Smoke, temperature, and carbon monoxide detection
- ⊕ Interconnected alarms
- ⊕ Double-check before sending alarm
- ⊕ Battery life is up to 4 years



# LeaksProtect

## Wireless flood detector

Wireless flood detector detects first signs of leakage within milliseconds. It is installed without using tools.

### Maximum Performance

- Works up to 1,300 meters from the hubs in open space
- Early detection of flooding

### Effortless Operation

- Alarms are automatically canceled if the water dries
- Two-way communication with the hubs allows for periodic testing and customization
- Saves energy by regulating power consumption based on the distance from Ajax hubs

### Simple Installation



Connects to the hubs with a few clicks and QR code



The quality of the connection can be tested remotely



No tools required for installation

### Bulletproof Protection



Authentication to prevent forgery



Jamming detection and communication channels encryption



Waterproof with nickel-plated contacts

## Tech specs

- Color: white/black
- Device type: wireless
- Use: indoor
- Power supply: 2 AAA
- Power supply voltage: 3 V
- Temperature sensor: available
- Radio signal power: 20 mW
- Ingress protection: IP65
- Working temperature range:  
from 0°C to +50°C
- Operating humidity: up to 100%
- Dimensions: 56x56x14 mm
- Weight: 40 g



Battery life is up to 3 years





# Socket

## Wireless smart plug with energy monitor

Socket is the simple-to-use power switch. It makes home smarter and cozier. Using the Socket it's easy to manage home appliance, automate routine tasks, and prevent a burnout.

### Maximum Performance

- Works up to 1,000 meters from the hubs in open space
- Allows for remotely switching connected devices on and off through the app
- Indicates about power level consumed by connected appliances using the LED
- Calculates energy consumption and shows data in the app

### Effortless Operation

- Operating voltage range: 110-230 V
- Remembers settings after power failure
- Two-way communication with the hubs allows for periodic testing and customization

### Simple Installation



Installed directly in the socket or power strips



Connects to the hubs with a few clicks and QR code



The quality of the connection can be tested remotely

### Bulletproof Protection



Protected from power surges and overheating



Authentication to prevent forgery



Jamming detection and communication channels encryption

## Tech specs

- Color: black/white
- Actuator: electromagnetic relay
- Maximum load current: 11 A
- Allowed power (resistive load at 230 V): up to 2.5 kW
- Allowed power (resistive load at 110 V): up to 1.2 kW
- Monitoring of power consumption parameters: current, voltage, power consumption
- Maximum temperature protection: over 85°C
- Voltage protection: below 184 V and under 253 V
- Radio signal power: up 25 mW
- Power consumption in standby mode: less than 1 W·h
- Ingress protection: IP20
- Operating humidity: up to 75%
- Dimensions: 65.5x45x45 mm
- Weight: 58 g





# WallSwitch

## Wireless power relay with energy monitor

The radio channel controller allows to control domestic appliances remotely. It is used to switch on/off irons, garage gates, water heaters and heat-insulated floors.

### Maximum Performance

- Works up to 1,000 meters from the hubs in open space
- Allows for remotely switching connected devices on and off through the app
- Calculates energy consumption and shows data in the app

### Effortless Operation

- Uses a remote antenna for better reception
- Operating voltage range: 110-230 V
- Remembers settings after power failure
- Two-way communication with the hubs allows for periodic testing and customization

### Simple Installation



Installed directly in the wall plate



Connects to the hubs with a few clicks and QR code



The quality of the connection can be tested remotely

### Bulletproof Protection



Protected from power surges and overheating



Jamming detection and communication channels encryption



Authentication to prevent forgery

### Tech Specs

- Color: black
- Actuator: electromagnetic relay
- Maximum load current: 13 A
- Allowed power (resistive load at 230 V): up to 3 kW
- Allowed power (resistive load at 110 V): up to 1.5 kW
- Monitoring of power consumption parameters: current, voltage, power consumption
- Maximum temperature protection: over 65°C inside the wall plate
- Radio signal power: 25 mW
- Power consumption in standby mode: less than 1 W·h
- Ingress protection: IP20
- Operating humidity: up to 75%
- Dimensions: 38x25x18 mm
- Weight: 30 g



# Relay

## Wireless low-tension dry contact relay

Radio channel controller for remote control of low current equipment. It is used to activate electric locks, gates and swing gates, rolling shutters and blinds, and to restart modems and routers.

### Maximum Performance

- Works up to 1,000 meters from the hubs in open space
- Allows for remotely switching connected devices on and off through the app
- Has a pulse equipment control function

### Effortless Operation

- Uses a remote antenna for better reception
- Operating voltage range: 7–24 V
- Remembers settings after power failure
- Two-way communication with the hubs allows for periodic testing and customization

### Simple Installation



Installed inside the connection boxes, electric service panels, or the housings of electric switchboards



Connects to the hubs with a few clicks and QR code



The quality of the connection can be tested remotely

### Bulletproof Protection



Protected from power surges and overheating



Jamming detection and communication channels encryption



Authentication to prevent forgery

### Tech Specs

- Color: black
- Actuator: electromagnetic relay
- Supply voltage range: 7–24 V (DC only)
- Maximum load current: 5 A at 36 V DC, 13 A at 230 V AC
- Output power (resistance load 230 V): up to 3 kW
- Monitoring of power consumption parameters: voltage
- Max. temperature protection: over 65°C at the place of installation or over 85°C inside the Relay
- Radio signal power: up to 25 mW
- Power consumption: less than 1 W·h
- Ingress protection: IP20
- Operating humidity: up to 75%
- Dimensions: 38x25x18 mm
- Weight: 25 g



# Transmitter

## Wireless module for third-party detector integration

Ajax Transmitter allows you to connect detectors with wired outputs to the security system. It helps protect property indoors and outdoors.

### Maximum Performance

- Works up to 1,600 meters from the hubs in open space
- Operates indoors and outdoors
- Can work with wired and autonomous detectors with a wired output

### Effortless Operation

- Two-way communication with the hubs allows for periodic testing and customization
- Battery indicator shows battery level in the mobile application

### Simple Installation



Connects to the hubs with a few clicks and QR code



The quality of the connection can be tested remotely

### Bulletproof Protection



Authentication to prevent forgery



Jamming detection and communication channels encryption



Disassembly immediately activates an alarm



Tampering alarm



## Tech specs

- Device type: wireless
- Maximum number of connected devices: 1
- Dismount protection: accelerometer
- Performance monitoring: yes
- History of alarms and service events: yes
- Alarm input: 1
- Tamper input: 1
- Power supply output: 3.3 V
- Temperature sensor: available
- Radio signal power: 25 mW
- Operating temperature range: from  $-25^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$
- Operating humidity: up to 75%
- Dimensions: 100x39x22 mm
- Weight: 74 g



# Coming soon



**ReX**

Radio signal range extender



**MotionProtect Curtain**

Wireless curtain motion detector



**MotionCam**

Motion detector  
with photo registration



**Button**

Wireless programmable button



The logo for AJAX, rendered in a stylized, white, sans-serif font. The letters are bold and feature sharp, angular cuts, giving it a modern and technical appearance.

When security is art

Learn more at

[www.ajax.systems](http://www.ajax.systems)